

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
20 January 2005 (20.01.2005) ✓

PCT

(10) International Publication Number
WO 2005/006355 A1 ✓

(51) International Patent Classification⁷: **H01B 17/26**

(21) International Application Number:
PCT/SE2004/000984

(22) International Filing Date: 17 June 2004 (17.06.2004)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
0302091-4 11 July 2003 (11.07.2003) SE

(71) Applicant (for all designated States except US): **ABB RE-
SEARCH LTD.** [CH/CH]; Allfolternstrasse 52, CH-8050
Zürich (CH).

(72) Inventors; and

(75) Inventors/Applicants (for US only): **ISBERG, Peter**
[SE/SE]; Lindskärsvägen 15, S-725 92 Västerås (SE).


ÖNNERY, Carina [SE/SE]; Lavegatan 32, S-724 82
Västerås (SE). **JOHANSSON, Erik** [SE/SE]; Lavendelvä-
gen 69, S-722 45 Västerås (SE). **LILJENBERG, Thomas**
[SE/SE]; Värmlandsvägen 4, S-722 44 Västerås (SE).
GETSON, Douglas [US/DE]; Ober der Linde 9, 53639
Königswinter (DE).

(74) Agent: **ABB AB**; Legal & Compliance/Intellectual Prop-
erty, Forskargränd 8, S-721 78 Västerås (SE).

(81) Designated States (unless otherwise indicated, for every
kind of national protection available): AE, AG, AL, AM,
AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN,
CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI,
GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE,
KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD,
MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG,
PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM,
TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM,
ZW.

[Continued on next page]

(54) Title: **BUSHING**

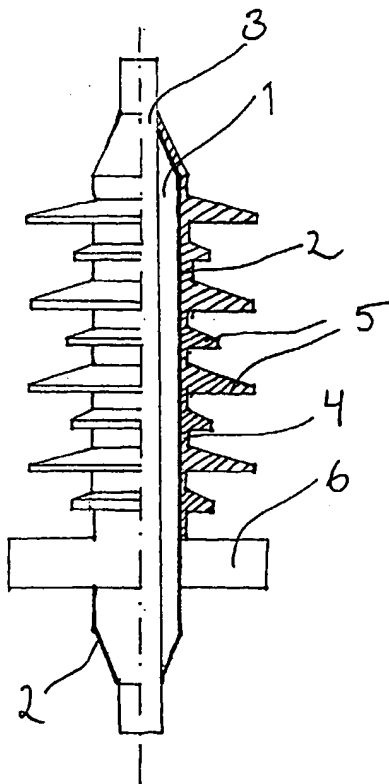

(57) Abstract: A bushing for an electrical device, comprising an insulating core (1, 7, 9), where at least a part of the insulating core (1, 7, 9) comprises a continuous diffusion barrier (2, 8) with firm adhesion to the insulating core (1, 7, 9). The bushing is manufactured by coating at least a part of the insulating core (1, 7, 9) with the continuous diffusion barrier (2, 8). Use of a bushing in a transformer.

WO 2005/006355 A1



(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PL, PT, RO, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— with international search report